
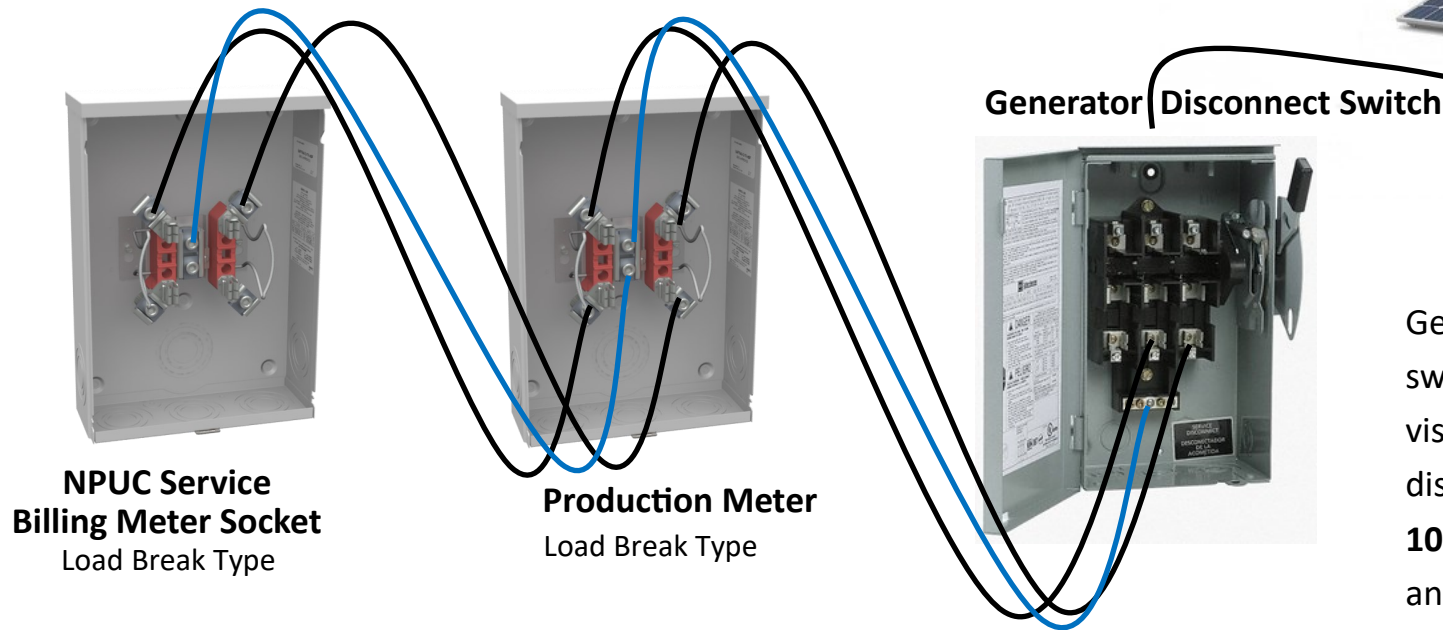


New Prague Utilities PV Interconnection Wire Diagram


Billing meter is a bidirectional meter. The delivered power (main register) is the power from NPUC. The received register is the extra power they didn't use. The difference is the NET meter amount. If the difference is positive NPUC is owed. If the difference is negative, NPUC pays the customer back.

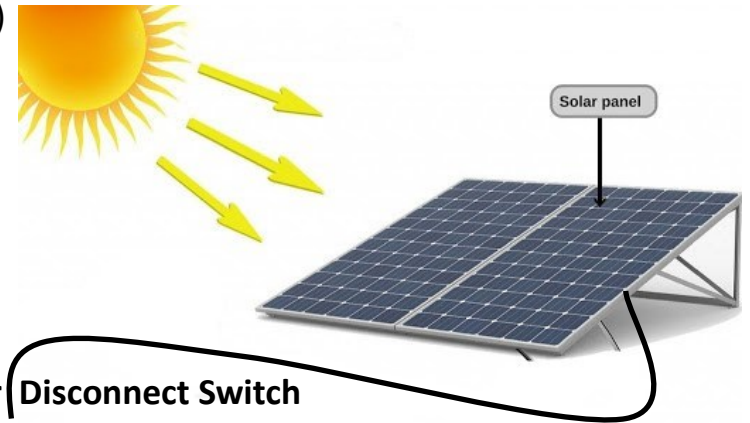

Generator disconnect switch shall provide a visible lockable manual disconnect switch within **10ft.** of the billing meter and be accessible 24/7 per MN rule 7835.5200

Production meter is a bidirectional meter that the delivered register reading is actually the total output of the generation.

Received register is what incidental power the equipment uses when idle.

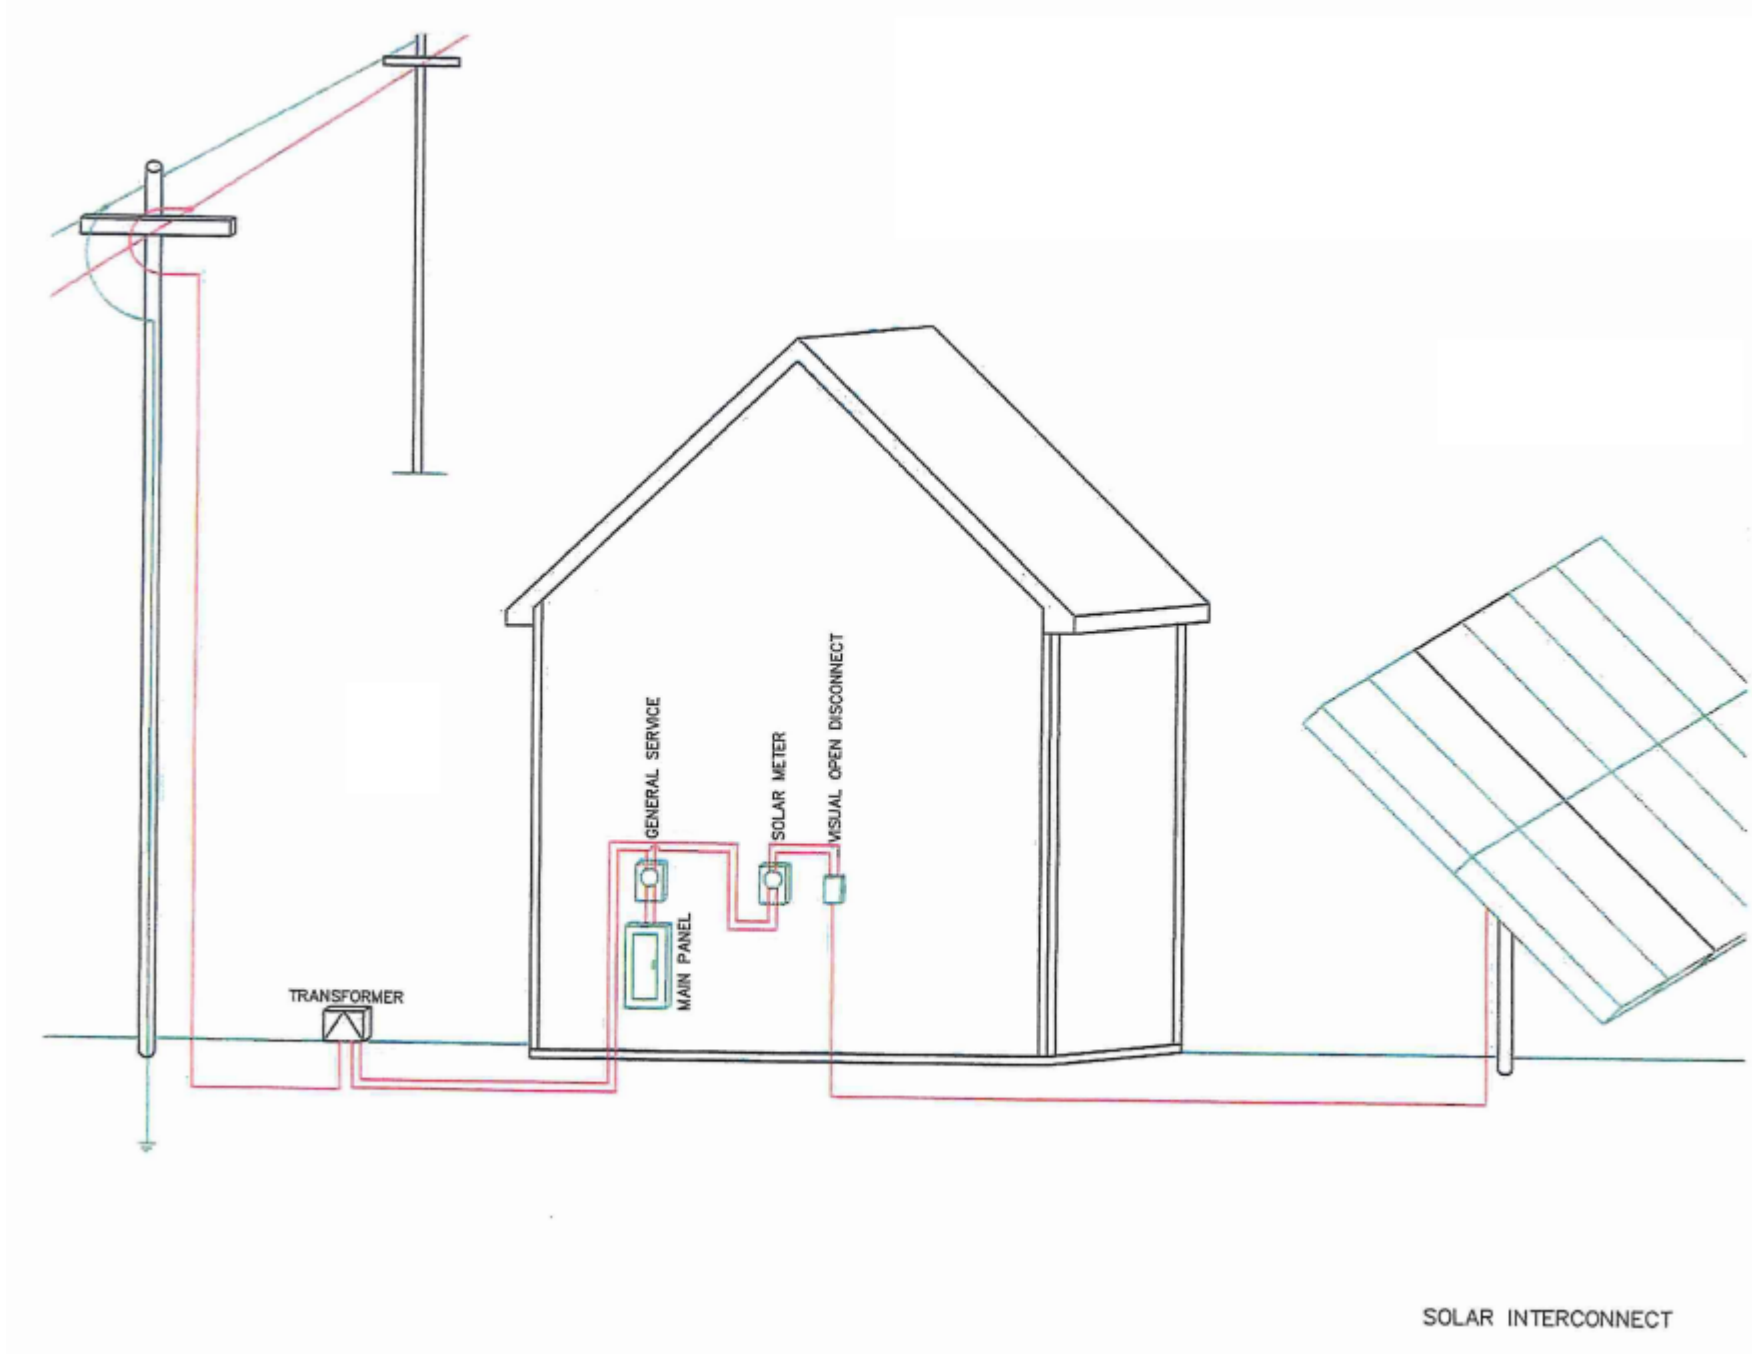

SOLAR INTERCONNECT